Customer Care Solutions
RH-23 Series Transceivers

RH-23 Parts List

Issue 1 02/2004
©Nokia Corporation

Table of Contents

Exploded Views of RH-23 3
Mechanical Parts 5
Variant Parts 7
Swap Units 7
Parts List with Grid References (RH-23) 9

 ©Nokia Corporation.

Exploded Views of RH-23

Figure 1: Upper Block

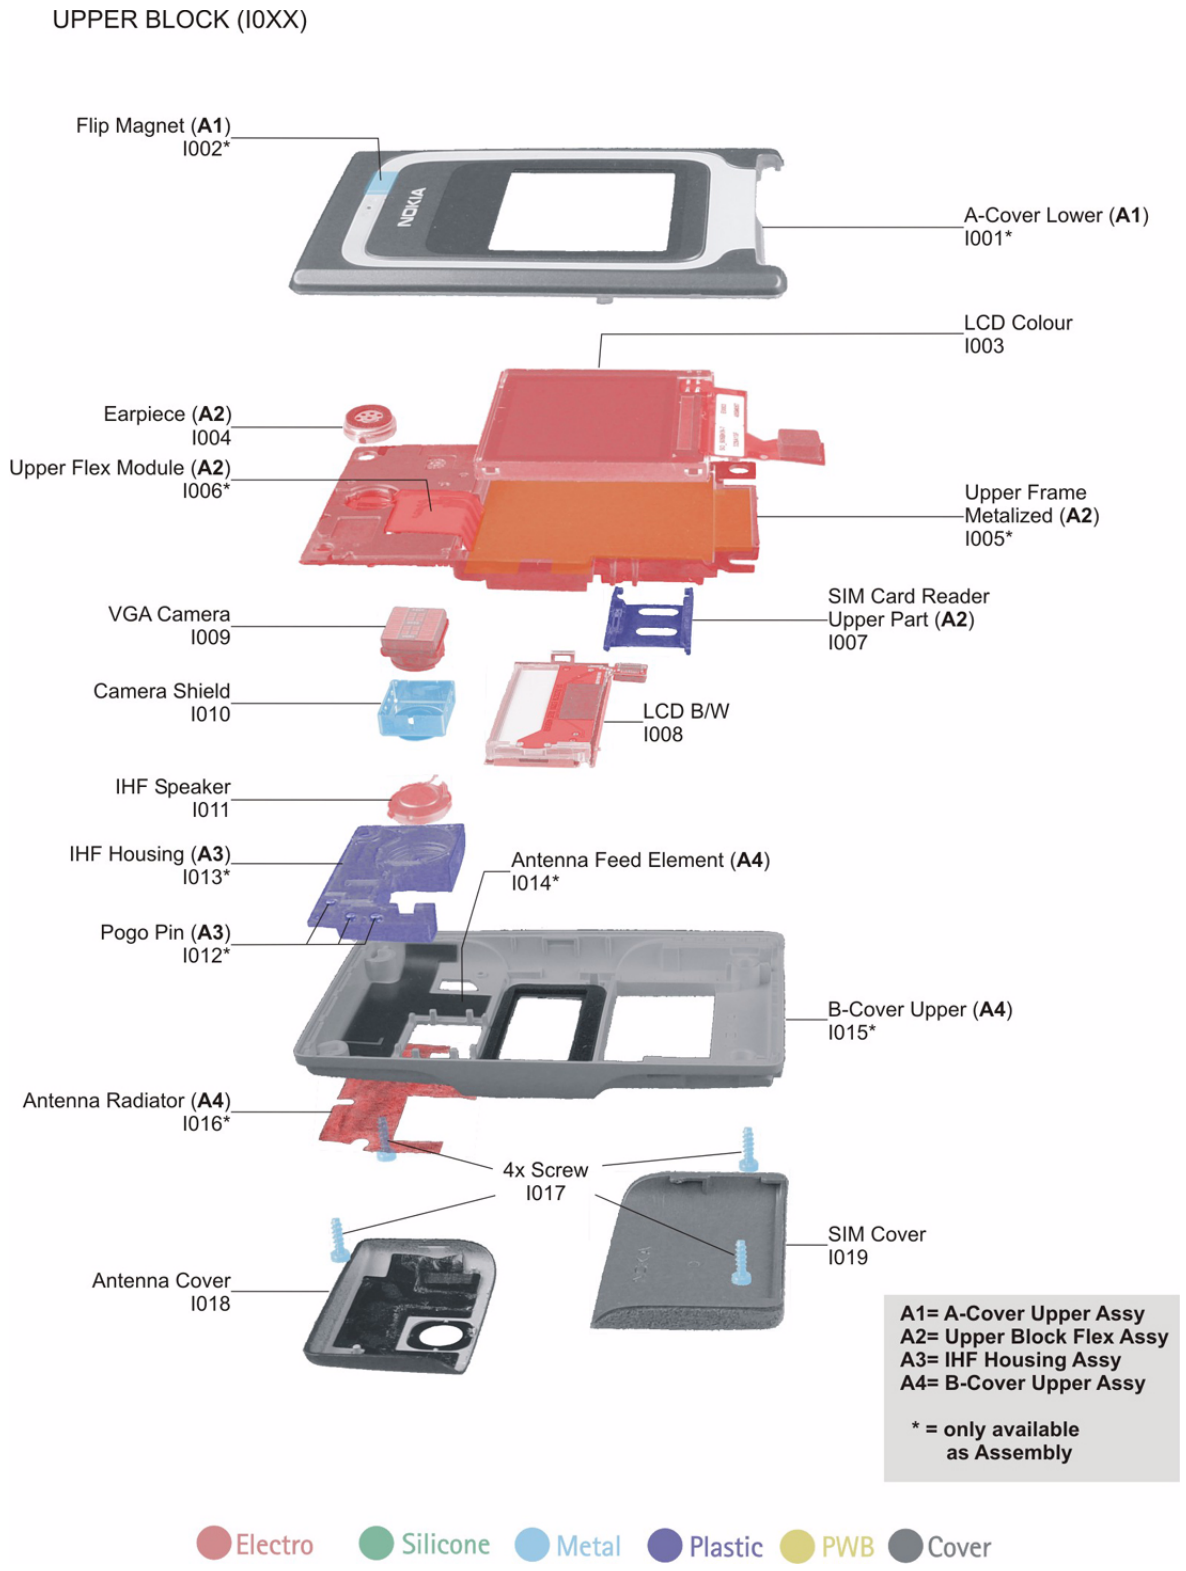

©Nokia Corporation.

Figure 2: Lower Block

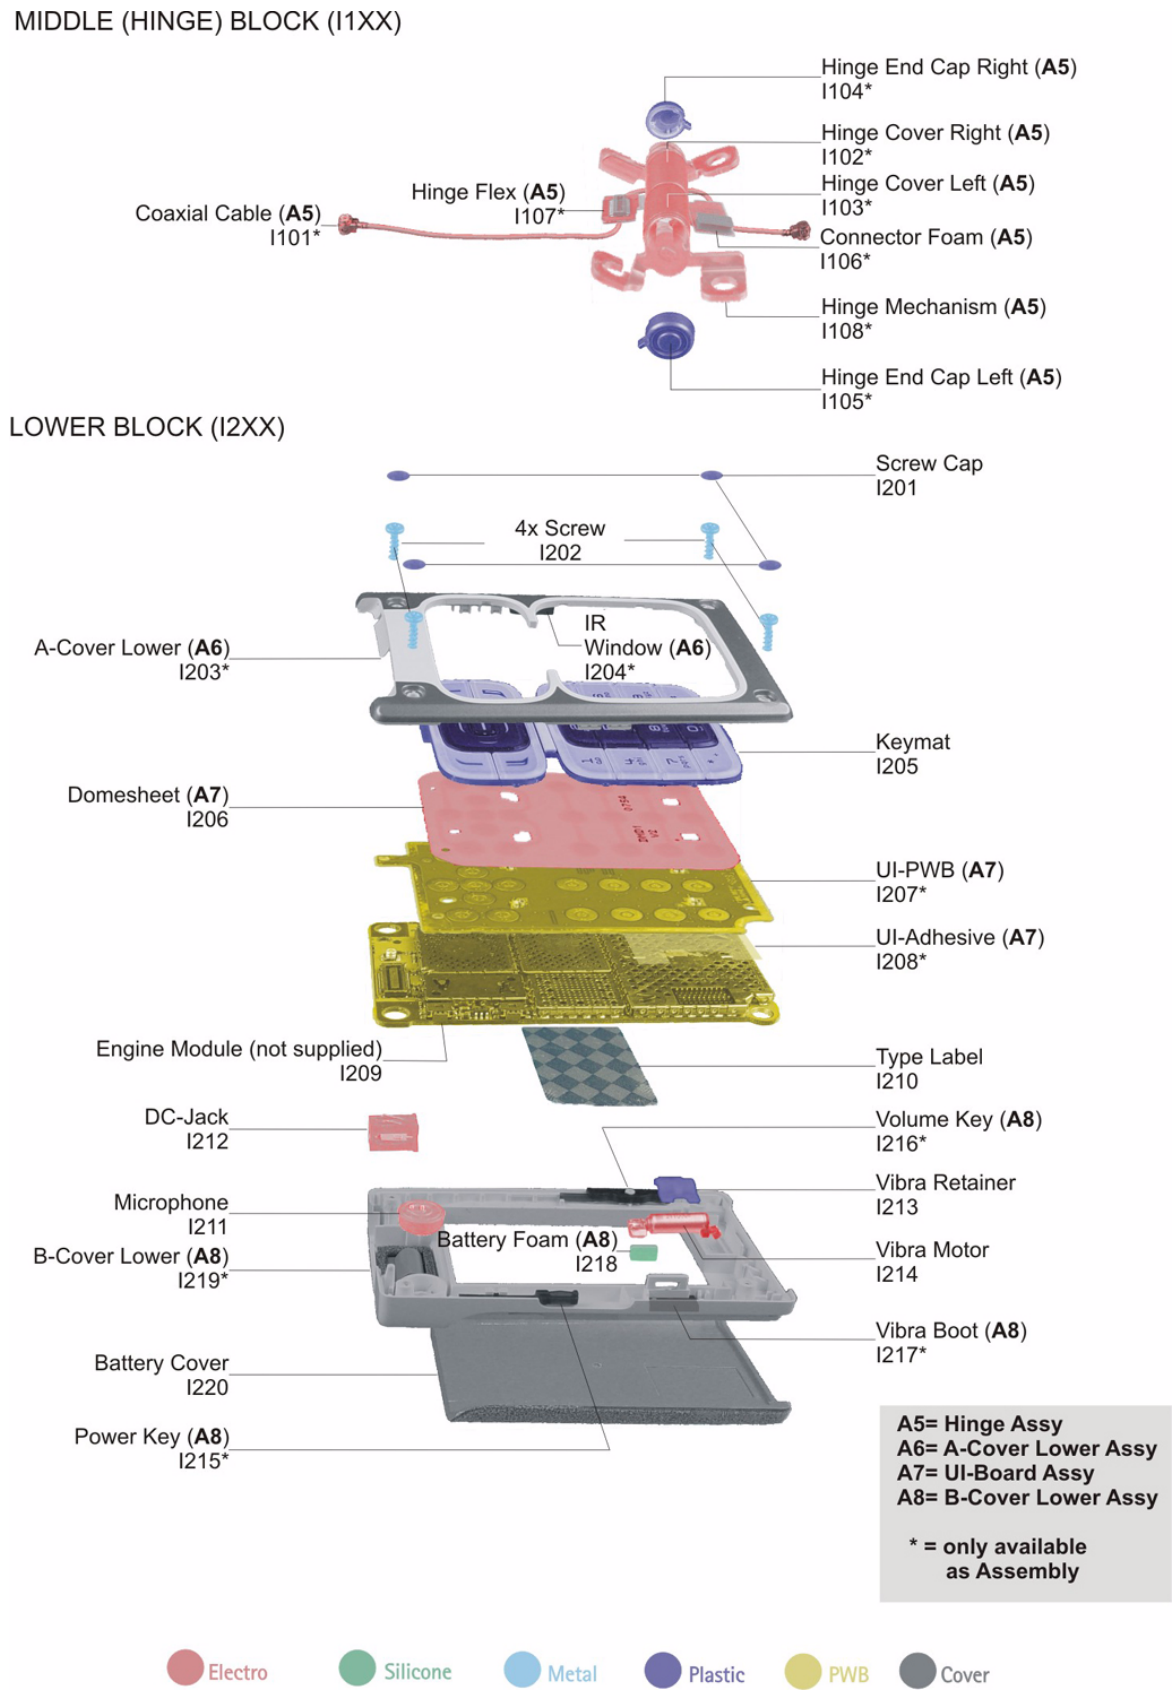

 ©Nokia Corporation.

Mechanical Parts

ITEM/CIRCUIT REF.	QTY	PART NO	PART NAME	INFO
-	**1**	**9459041**	**A-COVER UPPER ASSY**	
I001	1	-	A-COVER UPPER	
I002	1	-	FLIP-MAGNET	
I003	1	4850347	LCD COLOUR	
-	**1**	**263440**	**UPPER BLOCK FLEX ASSY**	
I004	1	5140247	EARPIECE	
I005	1	-	UPPER FRAME METALIZED	
I006	1	-	UPPER FLEX MODULE	
I007	1	5469921	SIM CARD READER UPPER PART	
I008	1	4850361	LCD B/W	
I009	1	4858023	VGA CAMERA	
I010	1	9511279	CAMERA SHIELD	
I011	1	5140253	IHF SPEAKER	
-	**1**	**9481278**	**IHF HOUSING ASSY**	
I012	3	-	POGO PIN	
I013	1	-	IHF HOUSING	
-	**1**	**XXXXXXX**	**B-COVER UPPER ASSY**	
I014	1	-	ANTENNA FEED ELEMENT	
I015	1	-	B-COVER UPPER	
I016	1	-	ANTENNA RADIATOR	
I017	4	6150113	SCREW 1.6X6	
I018	1	XXXXXXX	ANTENNA COVER	
I019	1	XXXXXXX	SIM COVER	
-	**1**	**9459046**	**HINGE ASSY**	
I101	1	-	COAXIAL CABLE	
I102	1	-	HINGE COVER RIGHT	
I103	1	-	HINGE COVER LEFT	
I104	1	-	HINGE END CAP RIGHT	
I105	1	-	HINGE END CAP LEFT	
I106	1	-	CONNECTOR FOAM	
I107	1	-	HINGE FLEX ASSY	

 ©Nokia Corporation.

I108	1	-	HINGE MECHANISM	
I201	4	9470484	SCREW CAP	
I202	4	6150113	SCREW 1.6X6	
-		**9459040**		
I203	1	-	A-COVER LOWER	
I204	-		IR WINDOW	
I205		XXXXXXX	KEYMAT	
-		**9498006**	**UI BOARD ASSY**	
I206		9795137	DOMESHEET	
I207		-	UI PWB	
I208		-	UI-ADHESIVE	
I209		-	ENGINE MODULE	
I210		XXXXXXX	TYPE LABEL	
I211		5140263	MICROPHONE	
I212		5400243	DC-JACK	
I213		9460567	VIBRA RETAINER	
I214		6800043	VIBRA MOTOR	
-		XXXXXXX	**B-COVER LOWER ASSY**	
I215		-	POWER KEY	
I216		-	VOLUME KEY	
I217		-	VIBRA BOOT	
I218		9481113	BATTERY FOAM	
I219		-	B-COVER LOWER	
I220		XXXXXXX	BATTERY COVER	

 ©Nokia Corporation.

Variant Parts

ITEM/ CIRCUIT REF.	QTY	PART NO	PART NAME	INFO
-		9459328	B-COVER UPPER ASSY WHITE	
-	1	9459327	B-COVER UPPER ASSY DARK MAGNA GREY	
I018	1	9459351	ANTENNA COVER BROWN	
I018	1	9459042	ANTENNA COVER GREY	
I018	1	9459350	ANTENNA COVER BLACK	
I019	1	9459075	SIM COVER BROWN	
I019	1	9459504	SIM COVER GREY BLUE	
I019	1	9459505	SIM COVER BLACK	
I205	1	9791044	KEYMAT LATIN	
I205	1	9791233	KEYMAT CYRILLIC/LATIN	EMEA
I205	1	9791234	KEYMAT HEBREW	EMEA
I205	1	9791235	KEYMAT ARABIC/LATIN	EMEA
I205	1	9791236	KEYMAT GREEK/LATIN	EMEA
I205	1	9791529	KEYMAT FARSI	EMEA
I205	1	9791530	KEYMAT URDU	EMEA
I205	1	9791237	BopoMoFo	APAC
I205	1	9791238	Stroke/Latin	APAC
I205	1	9791239	Thai/Latin	APAC
I210			TYPE AND 2D-WORK LABEL DMD10014	EMEA
I210			TYPE LABEL BLANK DMD12439	APAC
-	1	9459720	B-COVER LOWER ASSY WHITE	
-	1	9459721	B-COVER LOWER ASSY DARK MAGNA GREY	
I220	1	9459081	BATTERY COVER BROWN	
I220	1	9459499	BATTERY COVER GREY BLUE	
I220	1	9459500	BATTERY COVER BLACK	

Swap Units

PART NO	QTY	PART NAME	INFO
51982		RH-23 N7200 SWAP UNIT EUROPE&AFRICA BROWN	EMEA
51985		RH-23 N7200 SWAP UNIT EUROPE&AFRICA GREY BLUE	EMEA

©Nokia Corporation.

PART NO	QTY	PART NAME	INFO
51984		RH-23 N7200 SWAP UNIT EUROPE&AFRICA BLACK	EMEA
51915		RH-23 N7200 SWAP UNIT FRANCE BROWN	EMEA
51917		RH-23 N7200 SWAP UNIT FRANCE GREY BLUE	EMEA
51916		RH-23 N7200 SWAP UNIT FRANCE BLACK	EMEA
51955		RH-23 N7200 SWAP UNIT SOUTH AFRICA BROWN	EMEA
51958		RH-23 N7200 SWAP UNIT SOUTH AFRICA GREY BLUE	EMEA
51957		RH-23 N7200 SWAP UNIT SOUTH AFRICA BLACK	EMEA
51852		RH-23 N7200 SWAP UNIT POLAND BROWN	EMEA
51854		RH-23 N7200 SWAP UNIT POLAND GREY BLUE	EMEA
51853		RH-23 N7200 SWAP UNIT POLAND BLACK	EMEA
51912		RH-23 N7200 SWAP UNIT TURKEY BROWN	EMEA
51914		RH-23 N7200 SWAP UNIT TURKEY GREY BLUE	EMEA
51913		RH-23 N7200 SWAP UNIT TURKEY BLACK	EMEA
51951		RH-23 N7200 SWAP UNIT CZECH/SLOVAKIA BROWN	EMEA
51954		RH-23 N7200 SWAP UNIT CZECH/SLOVAKIA GREY BLUE	EMEA
51952		RH-23 N7200 SWAP UNIT CZECH/SLOVAKIA BLACK	EMEA
51973		RH-23 N7200 SWAP UNIT RUSSIA BROWN	EMEA
51976		RH-23 N7200 SWAP UNIT RUSSIA GREY BLUE	EMEA
51975		RH-23 N7200 SWAP UNIT RUSSIA BLACK	EMEA
51978		RH-23 N7200 SWAP UNIT UKRAINE BROWN	EMEA
51981		RH-23 N7200 SWAP UNIT UKRAINE GREY BLUE	EMEA
51979		RH-23 N7200 SWAP UNIT UKRAINE BLACK	EMEA
51998		RH-23 N7200 SWAP UNIT GULF AREA BROWN	EMEA
52005		RH-23 N7200 SWAP UNIT GULF AREA GREY BLUE	EMEA
51999		RH-23 N7200 SWAP UNIT GULF AREA BLACK	EMEA
52006		RH-23 N7200 SWAP UNIT GREEK BROWN	EMEA
52008		RH-23 N7200 SWAP UNIT GREEK GREY BLUE	EMEA
52007		RH-23 N7200 SWAP UNIT GREEK BLACK	EMEA
51995		RH-23 N7200 SWAP UNIT ISRAEL BROWN	EMEA
51997		RH-23 N7200 SWAP UNIT ISRAEL GREY BLUE	EMEA
51996		RH-23 N7200 SWAP UNIT ISRAEL BLACK	EMEA

 ©Nokia Corporation.

Parts List with Grid References (RH-23)

Item	Code	Side	X	Y	Type	Name	Value	
A100	9517288	Top	M	5	SHIELD_DMC06303	BB SHIELD ASSEMBLY DMC06303	~	~
A300	9517292	Top	D	3	SHIELD_DMC06362	BB SHIELD ASSEMBLY 2 DMC06362	~	~
A310	9854728	Bottom	B	9	VIBRA_BLOCK_1BE	PWB 1BE 3.8X3.5X2 D2	~	~
A356	9517242	Top	H	3	SHIELD_DMC05342	NECTAR J SHIELD AS DMC05342 NHL4J	~	~
A500	9517287	Top	D	6	SHIELD_DMC06300	RF SHIELD ASSEMBLY DMC06300	~	~
A700	9517304	Top	H	6	SHIELD_DMC06519	RF SHIELD ASSEMBLY 2 DMC06519	~	~
B100	5140263	Bottom	N	8	MIC_KUB4323_018030	MIC+BOOT ASSY -42+-3DB D7.7X3.0MM	~	~
B200	4510219	Top	M	8	CRYSTAL_CX_4V	CRYSTAL 32.768KHZ+-30PPM 9PF	32.768kHz	~
C100	2320546	Top	B	7	0402C	Chipcap 5% NP0	27p	50V
C101	2320481	Bottom	N	4	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C102	2320481	Bottom	N	5	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C103	2321013	Top	N	7	0402C	CHIPCAP NP0 270P J 25V 0402	270p	25V
C104	2315201	Bottom	M	5	0405_2_P0.65	CHIP ARRAY NP0 2X27P K 25V 0405	2x27p	25V
C106	2320744	Top	N	6	0402C	Chipcap X7R 10% 50V 0402	1n0	50V
C107	2320536	Bottom	N	6	0402C	Chipcap 5% NP0	10p	50V
C108	2320536	Bottom	N	6	0402C	Chipcap 5% NP0	10p	50V
C109	2320536	Bottom	N	7	0402C	Chipcap 5% NP0	10p	50V
C110	2320544	Top	N	5	0402C	Chipcap 5% NP0	22p	50V
C112	2320778	Bottom	N	4	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C113	2320756	Bottom	N	7	0402C	Chipcap X7R 10% 50V 0402	3n3	50V
C114	2320756	Bottom	N	7	0402C	Chipcap X7R 10% 50V 0402	3n3	50V
C115	2320756	Bottom	N	5	0402C	Chipcap X7R 10% 50V 0402	3n3	50V
C116	2320756	Bottom	N	6	0402C	Chipcap X7R 10% 50V 0402	3n3	50V
C117	2320536	Bottom	N	6	0402C	Chipcap 5% NP0	10p	50V
C118	2320756	Bottom	N	7	0402C	Chipcap X7R 10% 50V 0402	3n3	50V
C119	2320756	Bottom	M	7	0402C	Chipcap X7R 10% 50V 0402	3n3	50V
C150	2316001	Bottom	M	7	0603C	CHIPCAP X5R 2U2 K 6V3 0603	2u2	6V3
C151	2320744	Bottom	L	9	0402C	Chipcap X7R 10% 50V 0402	1n0	50V
C152	2316001	Bottom	M	9	0603C	CHIPCAP X5R 2U2 K 6V3 0603	2u2	6V3
C153	2315209	Bottom	L	9	0405_2_P0.65_AVX	CHIP ARRAY X5R 2X33N M 10V 0405	2x33n	10V
C154	2315209	Bottom	M	6	0405_2_P0.65_AVX	CHIP ARRAY X5R 2X33N M 10V 0405	2x33n	10V
C155	2315201	Top	N	8	0405_2_P0.65	CHIP ARRAY NP0 2X27P K 25V 0405	2x27p	25V
C156	2320744	Bottom	L	9	0402C	Chipcap X7R 10% 50V 0402	1n0	50V
C157	2315201	Bottom	N	7	0405_2_P0.65	CHIP ARRAY NP0 2X27P K 25V 0405	2x27p	25V
C158	2315201	Bottom	O	7	0405_2_P0.65	CHIP ARRAY NP0 2X27P K 25V 0405	2x27p	25V
C159	2315201	Bottom	M	6	0405_2_P0.65	CHIP ARRAY NP0 2X27P K 25V 0405	2x27p	25V
C160	2320805	Top	N	7	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C161	2320805	Top	O	8	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C162	2320805	Top	O	4	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C163	2320805	Top	O	4	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C164	2320744	Bottom	A	2	0402C	Chipcap X7R 10% 50V 0402	1n0	50V
C165	2320805	Top	O	4	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C166	2320481	Top	N	8	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C167	2320481	Top	O	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C168	2320805	Bottom	N	7	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C169	2320805	Top	N	7	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C170	2320805	Top	N	8	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C171	2320540	Top	O	8	0402C	Chipcap 5% NP0	15p	50V
C172	2320744	Bottom	M	6	0402C	Chipcap X7R 10% 50V 0402	1n0	50V
C173	2320744	Bottom	M	6	0402C	Chipcap X7R 10% 50V 0402	1n0	50V
C174	2320744	Bottom	A	2	0402C	Chipcap X7R 10% 50V 0402	1n0	50V
C200	2320805	Top	L	8	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C201	2320481	Top	K	9	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C202	2320778	Top	K	9	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C203	2320481	Top	N	6	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C204	2320481	Top	M	9	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C205	2320481	Top	M	8	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C206	2320481	Top	L	8	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C207	2320481	Top	N	6	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C208	2320481	Top	L	8	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C209	2320536	Top	M	9	0402C	Chipcap 5% NP0	10p	50V
C210	2320536	Top	N	8	0402C	Chipcap 5% NP0	10p	50V
C211	2320481	Top	M	9	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C212	2320481	Top	M	9	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C213	2320481	Top	M	9	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C214	2320481	Top	N	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C215	2320481	Top	N	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C218	2320805	Top	N	6	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C219	2320481	Top	J	8	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V

 ©Nokia Corporation.

Item	Code	Side	X	Y	Type	Name	Value	
C220	2320778	Top	N	6	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C221	2320481	Top	K	8	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C222	2320481	Top	J	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C223	2320481	Top	J	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C224	2320481	Top	J	8	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C225	2320481	Top	K	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C226	2320481	Top	J	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C227	2320481	Top	J	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C228	2320481	Top	K	6	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C229	2320481	Top	J	6	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C230	2320481	Top	J	6	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C231	2320481	Top	K	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C232	2320481	Top	K	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C233	2320481	Top	K	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C234	2320481	Top	K	6	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C235	2320481	Top	N	8	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C236	2320805	Top	K	5	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C237	2320805	Top	K	6	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C238	2320805	Top	L	8	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C239	2320805	Top	N	7	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C240	2320778	Top	N	6	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C241	2320744	Top	N	6	0402C	Chipcap X7R 10% 50V 0402	1n0	50V
C242	2320744	Top	N	7	0402C	Chipcap X7R 10% 50V 0402	1n0	50V
C243	2320481	Top	O	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C260	2320481	Top	J	8	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C261	2320481	Top	K	9	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C262	2320481	Top	K	8	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C263	2320481	Top	K	8	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C264	2320481	Top	L	8	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C265	2320481	Top	O	6	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C300	2320481	Top	J	2	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C301	2320481	Top	K	2	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C302	2320481	Top	J	2	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C303	2320481	Top	K	3	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C309	2320778	Bottom	B	8	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C311	2320481	Top	O	2	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C319	2320778	Top	D	3	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C320	2320481	Top	F	3	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C321	2316001	Top	F	3	0603C	CHIPCAP X5R 2U2 K 6V3 0603	2u2	6V3
C322	2316001	Top	F	3	0603C	CHIPCAP X5R 2U2 K 6V3 0603	2u2	6V3
C323	2320778	Top	E	3	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C324	2320778	Top	D	3	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C325	2320778	Top	E	3	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C326	2320778	Top	E	3	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C327	2320778	Top	F	3	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C328	2320805	Top	E	3	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C329	2320778	Top	D	4	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C330	2320481	Top	C	3	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C331	2320481	Top	C	2	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C332	2320481	Top	C	3	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C333	2320481	Top	C	4	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C350	2312243	Bottom	I	9	0805C	CHIPCAP X5R 4U7 K 6V3 0805	4u7	6V3
C351	2320544	Bottom	G	9	0402C	Chipcap 5% NP0	22p	50V
C352	2320805	Bottom	G	9	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C353	2320805	Bottom	G	9	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C357	2320778	Top	I	2	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C358	2320785	Top	I	2	0402C	chipcap x7r 47n k 10v 0402	47n	10V
C359	2320805	Top	I	3	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C361	2320744	Top	G	3	0402C	Chipcap X7R 10% 50V 0402	1n0	50V
C362	2320778	Top	I	3	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C363	2315261	Top	G	2	0405_2_P0.65	CHIP ARRAY X5R 2X47N K 10V 0405	2x47n	10V
C364	2321007	Top	G	4	0402C	CERCAP X7R 22N K 16V 0402	22n	16V
C365	2315209	Top	G	3	0405_2_P0.65_AVX	CHIP ARRAY X5R 2X33N M 10V 0405	2x33n	10V
C366	2320785	Top	G	2	0402C	chipcap x7r 47n k 10v 0402	47n	10V
C367	2320560	Top	H	1	0402C	Chipcap 5% NP0	100p	50V
C370	2320760	Top	H	1	0402C	Chipcap X7R 10% 25V 0402	4n7	25V
C371	2320778	Top	G	2	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C372	2320481	Top	G	2	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C373	2321007	Top	G	4	0402C	CERCAP X7R 22N K 16V 0402	22n	16V
C374	2320744	Top	H	3	0402C	Chipcap X7R 10% 50V 0402	1n0	50V

 ©Nokia Corporation.

Item	Code	Side	X	Y	Type	Name	Value	
C375	2320752	Top	G	4	0402C	Chipcap X7R 10% 50V 0402	2n2	50V
C378	2320546	Top	H	1	0402C	Chipcap 5% NP0	27p	50V
C379	2320552	Top	H	2	0402C	Chipcap 5% NP0	47p	50V
C400	2320778	Top	N	5	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C401	2320805	Top	O	4	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C402	2320778	Top	L	5	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C403	2320778	Bottom	M	3	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C404	2320778	Top	O	4	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C405	2320778	Top	K	5	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C420	2320560	Top	L	5	0402C	Chipcap 5% NP0	100p	50V
C421	2320560	Top	K	6	0402C	Chipcap 5% NP0	100p	50V
C422	2320560	Top	K	6	0402C	Chipcap 5% NP0	100p	50V
C450	2320778	Top	K	5	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C451	2320805	Top	K	5	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C454	2320779	Top	J	5	0603_BLM	CHIPCAP X7R 100N K 16V 0603	100n	16V
C500	2320598	Top	G	5	0402C	Chipcap 5% X7R	3n9	50V
C501	2320805	Top	H	8	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C502	2320508	Top	I	7	0402C	Chipcap +-0.25pF NP0	1p0	50V
C503	2320560	Top	I	8	0402C	Chipcap 5% NP0	100p	50V
C504	2322037	Top	H	8	0603C	CHIPCAP NP0 2N7 G 50V 0603	2n7	50V
C505	2321013	Top	I	8	0402C	CHIPCAP NP0 270P J 25V 0402	270p	25V
C507	2322023	Top	G	6	0603C	CHIPCAP NP0 2N2 J 16V 0603	2n2	16V
C508	2320518	Top	G	5	0402C	Chipcap +-0.25pF NP0	1p8	50V
C509	2320518	Top	G	5	0402C	Chipcap +-0.25pF NP0	1p8	50V
C511	2320560	Top	E	7	0402C	Chipcap 5% NP0	100p	50V
C512	2322023	Top	G	5	0603C	CHIPCAP NP0 2N2 J 16V 0603	2n2	16V
C513	2322023	Top	G	6	0603C	CHIPCAP NP0 2N2 J 16V 0603	2n2	16V
C520	2320554	Top	H	5	0402C	Chipcap 5% NP0	56p	50V
C522	2320532	Top	G	5	0402C	Chipcap +-0.25pF NP0	6p8	50V
C532	2320538	Top	G	6	0402C	Chipcap 5% NP0	12p	50V
C533	2320552	Top	G	6	0402C	Chipcap 5% NP0	47p	50V
C535	2320552	Top	I	5	0402C	Chipcap 5% NP0	47p	50V
C536	2320552	Top	I	6	0402C	Chipcap 5% NP0	47p	50V
C537	2320560	Top	H	5	0402C	Chipcap 5% NP0	100p	50V
C538	2320744	Top	I	6	0402C	Chipcap X7R 10% 50V 0402	1n0	50V
C540	2320491	Top	H	4	0603C	CHIPCAP X7R 220N K 10V 0603	220n	10V
C543	2320558	Top	I	7	0402C	Chipcap 5% NP0	82p	50V
C549	2320805	Top	H	7	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C550	2321013	Top	H	5	0402C	CHIPCAP NP0 270P J 25V 0402	270p	25V
C551	2320546	Top	H	5	0402C	Chipcap 5% NP0	27p	50V
C552	2320805	Top	I	6	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C553	2320536	Top	I	6	0402C	Chipcap 5% NP0	10p	50V
C554	2320554	Top	G	7	0402C	Chipcap 5% NP0	56p	50V
C555	2320805	Top	H	7	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C560	2320532	Top	H	8	0402C	Chipcap +-0.25pF NP0	6p8	50V
C568	2320907	Top	H	5	0402C_AVX	CHIPCAP NP0 HQ 0P7 B 16V 0402	0p7	16V
C574	2320536	Top	I	5	0402C	Chipcap 5% NP0	10p	50V
C575	2314001	Top	H	8	0402C	CHIPCAP NP0 470P J 6V3 0402	470p	6V3
C576	2314001	Top	H	8	0402C	CHIPCAP NP0 470P J 6V3 0402	470p	6V3
C577	2314001	Top	G	8	0402C	CHIPCAP NP0 470P J 6V3 0402	470p	6V3
C578	2314001	Top	G	8	0402C	CHIPCAP NP0 470P J 6V3 0402	470p	6V3
C579	2320778	Top	G	7	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C580	2320602	Top	I	8	0402C	Chipcap +-0.25pF NP0	4p7	50V
C700	2320554	Top	D	6	0402C	Chipcap 5% NP0	56p	50V
C701	2320554	Top	C	5	0402C	Chipcap 5% NP0	56p	50V
C702	2320554	Top	E	5	0402C	Chipcap 5% NP0	56p	50V
C703	2320538	Top	C	5	0402C	Chipcap 5% NP0	12p	50V
C704	2320538	Top	E	5	0402C	Chipcap 5% NP0	12p	50V
C705	2320554	Top	E	5	0402C	Chipcap 5% NP0	56p	50V
C706	2320620	Top	E	6	0402C	Chipcap X7R 5% 16V 0402	10n	16V
C710	2312243	Top	C	5	0805C	CHIPCAP X5R 4U7 K 6V3 0805	4u7	6V3
C711	2320546	Top	C	5	0402C	Chipcap 5% NP0	27p	50V
C712	2611745	Bottom	A	4	TANT_TPSY	CHIPTCAP 150U M 10V 7.3X4.3X2.0	150u_10V	10V
C713	2320516	Top	E	6	0402C	Chipcap +-0.25pF NP0	1p5	50V
C714	2320540	Top	F	6	0402C	Chipcap 5% NP0	15p	50V
C715	2320540	Top	F	6	0402C	Chipcap 5% NP0	15p	50V
C716	2320508	Top	F	6	0402C	Chipcap +-0.25pF NP0	1p0	50V
C717	2320584	Top	E	6	0402C	Chipcap 5% X7R	1n0	50V
C718	2310045	Top	E	6	0402C_GRM36	CHIPCAP X5R 68N K 10V 0402	68n	10V
C719	2320584	Top	C	4	0402C	Chipcap 5% X7R	1n0	50V

©Nokia Corporation.

Item	Code	Side	X	Y	Type	Name	Value	
C720	2310045	Top	G	5	0402C_GRM36	CHIPCAP X5R 68N K 10V 0402	68n	10V
C723	2320546	Top	E	5	0402C	Chipcap 5% NP0	27p	50V
C724	2320546	Top	F	5	0402C	Chipcap 5% NP0	27p	50V
C725	2320631	Top	E	4	0402C	CHIPCAP NP0 180P J 25V 0402	180p	25V
C726	2320584	Top	D	4	0402C	Chipcap 5% X7R	1n0	50V
C727	2320584	Top	D	6	0402C	Chipcap 5% X7R	1n0	50V
C729	2320508	Top	C	5	0402C	Chipcap +-0.25pF NP0	1p0	50V
C730	2320621	Top	D	6	0402C	CHIPCAP NP0 0P5 C 50V 0402	0p5	50V
C732	2320516	Top	D	6	0402C	Chipcap +-0.25pF NP0	1p5	50V
C734	2320520	Top	F	4	0402C	Chipcap +-0.25pF NP0	2p2	50V
C735	2320508	Top	C	5	0402C	Chipcap +-0.25pF NP0	1p0	50V
C804	2320526	Top	C	8	0402C	Chipcap +-0.25pF NP0	3p9	50V
C805	2320526	Top	B	6	0402C	Chipcap +-0.25pF NP0	3p9	50V
C806	2320526	Top	C	8	0402C	Chipcap +-0.25pF NP0	3p9	50V
C807	2320560	Top	G	7	0402C	Chipcap 5% NP0	100p	50V
C808	2320560	Top	G	6	0402C	Chipcap 5% NP0	100p	50V
C826	2320520	Top	E	6	0402C	Chipcap +-0.25pF NP0	2p2	50V
C827	2320805	Top	E	6	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C828	2320540	Top	E	6	0402C	Chipcap 5% NP0	15p	50V
C829	2320514	Top	E	7	0402C	Chipcap +-0.25pF NP0	1p2	50V
C830	2320516	Top	F	8	0402C	Chipcap +-0.25pF NP0	1p5	50V
C831	2320552	Top	B	6	0402C	Chipcap 5% NP0	47p	50V
C832	2320907	Top	D	7	0402C_AVX	CHIPCAP NP0 HQ 0P7 B 16V 0402	0p7	16V
C841	2320530	Top	D	6	0402C	Chipcap +-0.25pF NP0	5p6	50V
C842	2320621	Top	A	7	0402C	CHIPCAP NP0 0P5 C 50V 0402	0p5	50V
D200	4370825	Top	L	7	uBGA168	UEMK 4.4 W-DOG ENA TO21 TFBGA168	~	~
D300	4341425	Top	J	2	USMD14_2.433X2.11ABC_0.675	WHITE LED DRIVER LM2795TLX USMD14	~	~
D304	4371103	Top	E	3	uBGA_56	HW ACCELERATOR STV0900V4.0 6X6BGA	~	~
D305	4341425	Top	C	3	USMD14_2.433X2.11ABC_0.675	WHITE LED DRIVER LM2795TLX USMD14	~	~
D400	4370873	Top	M	4	uBGA144_CC	UPP8M V2.2 F751986B C035 UBGA144	~	~
D450	4341409	Top	K	4	COMBO_128MB_SI	COMBO NMP DCT4 128M NOR + 8M SRAM	8MX16/512kX16	~
F100	5119029	Bottom	N	4	0603_FUSE	SM FUSE F 1.5A 32V ROHS-FREE 0603	1.5A	~
G300	4700141	Bottom	J	9	BATTER_RB414H	CELL CAPACITOR 0.01MAH 3V3	3V3	~
G500	435B093	Top	I	8	VCO_FDK_WB002	VCO 3296-3980MHZ 2.7V 4-BAND FDK	3296-3980MHz	~
G501	4510417	Top	I	5	NGK3138C	VCTCXO 26MHZ +-3PPM 2.7v 1.3MA GSM	26MHz	~
L100	3203743	Top	O	5	0805_BLM21	FERR.BEAD 0R03 42R/100MHZ 3A 0805	42R/100MHz	~
L101	3203755	Bottom	M	9	FERRITE_0402	FERRITE BEAD 0.6R 600R/100MHZ 0402	600R/100MHz	~
L102	3203803	Bottom	N	6	0405_2_H1.0	CHIP BEAD ARRAY 2X1000R 0405	2x1000R/100MHz	~
L103	3203803	Bottom	N	6	0405_2_H1.0	CHIP BEAD ARRAY 2X1000R 0405	2x1000R/100MHz	~
L104	3203803	Bottom	N	7	0405_2_H1.0	CHIP BEAD ARRAY 2X1000R 0405	2x1000R/100MHz	~
L105	3646081	Bottom	N	6	0402L_XL	CHIP COIL 68N J Q17/300M 0402	68nH	~
L106	3203755	Bottom	N	5	FERRITE_0402	FERRITE BEAD 0.6R 600R/100MHZ 0402	600R/100MHz	~
L107	3203741	Bottom	N	5	0603_BLM	FERRITE BEAD 0R5 600R/100MHZ 0603	600R/100MHz	~
L109	3203755	Bottom	N	5	FERRITE_0402	FERRITE BEAD 0.6R 600R/100MHZ 0402	600R/100MHz	~
L150	3203803	Bottom	B	3	0405_2_H1.0	CHIP BEAD ARRAY 2X1000R 0405	2x1000R/100MHz	~
L151	3645349	Bottom	A	3	COIL_0603CS	CHIP COIL 33NH G Q40/250MHZ 0603	33nH	~
L152	3645349	Bottom	A	3	COIL_0603CS	CHIP COIL 33NH G Q40/250MHZ 0603	33nH	~
L260	3203741	Top	J	8	0603_BLM	FERRITE BEAD 0R5 600R/100MHZ 0603	600R/100MHz	~
L261	3203741	Top	K	9	0603_BLM	FERRITE BEAD 0R5 600R/100MHZ 0603	600R/100MHz	~
L262	3203741	Top	K	8	0603_BLM	FERRITE BEAD 0R5 600R/100MHZ 0603	600R/100MHz	~
L263	3203741	Top	K	8	0603_BLM	FERRITE BEAD 0R5 600R/100MHZ 0603	600R/100MHz	~
L264	3203741	Top	K	8	0603_BLM	FERRITE BEAD 0R5 600R/100MHZ 0603	600R/100MHz	~
L265	3203741	Top	O	6	0603_BLM	FERRITE BEAD 0R5 600R/100MHZ 0603	600R/100MHz	~
L356	3645349	Top	I	2	COIL_0603CS	CHIP COIL 33NH G Q40/250MHZ 0603	33nH	~
L357	3645349	Top	I	2	COIL_0603CS	CHIP COIL 33NH G Q40/250MHZ 0603	33nH	~
L358	3645233	Top	H	2	COIL_JELF243Q	CHIP COIL 120N G Q32/150MHZ 0603	120nH	~
L500	3646011	Top	H	5	0402_ELJRF	CHIP COIL 4N7 +-0N3 Q7/100M 0402	4n7H	~
L501	3646011	Top	H	5	0402_ELJRF	CHIP COIL 4N7 +-0N3 Q7/100M 0402	4n7H	~
L510	3646047	Top	I	6	0402L	CHIP COIL 3N3 +-0N3 Q28/800M 0402	3n3H	~
L511	3203755	Top	H	5	FERRITE_0402	FERRITE BEAD 0.6R 600R/100MHZ 0402	600R/100MHz	~
L700	3203743	Top	C	5	0805_BLM21	FERR.BEAD 0R03 42R/100MHZ 3A 0805	42R/100MHz	~
L701	3646051	Top	E	6	0402L	CHIP COIL 3N9 +-0N3 Q28/800M 0402	3n9H	~
L703	3646069	Top	E	5	0402L	CHIP COIL 33N J Q23/800M 0402	33nH	~
L706	3203725	Top	E	5	FERRITE_0402	FERRITE BEAD 0R6 600R/100M 0402	600R/100MHz	~
L707	3646055	Top	E	4	0402L	CHIP COIL 8N2 J Q28/800MHZ 0402	8n2H	~
L708	3646065	Top	C	6	0402L	CHIP COIL 12N J Q31/800M 0402	12nH	~
L800	3646047	Top	E	7	0402L	CHIP COIL 3N3 +-0N3 Q28/800M 0402	3n3H	~
L805	3646055	Top	G	7	0402L	CHIP COIL 8N2 J Q28/800MHZ 0402	8n2H	~
L806	3646065	Top	F	7	0402L	CHIP COIL 12N J Q31/800M 0402	12nH	~
L807	3646065	Top	F	8	0402L	CHIP COIL 12N J Q31/800M 0402	12nH	~

 ©Nokia Corporation.

Item	Code	Side	X	Y	Type	Name	Value	
L822	3646043	Top	E	7	0402L	CHIP COIL 1N5 +-0N3 Q33/800M 0402	1n5H	~
L823	3646043	Top	E	8	0402L	CHIP COIL 1N5 +-0N3 Q33/800M 0402	1n5H	~
L824	3646047	Top	D	6	0402L	CHIP COIL 3N3 +-0N3 Q28/800M 0402	3n3H	~
L826	3646075	Top	B	6	0402L	CHIP COIL 56N J Q21/800M 0402	56nH	~
L827	3646075	Top	C	8	0402L	CHIP COIL 56N J Q21/800M 0402	56nH	~
L828	3646075	Top	C	8	0402L	CHIP COIL 56N J Q21/800M 0402	56nH	~
N100	4341063	Bottom	N	4	SOT23_5_H1.2	REG 2.8V/150MA LP3985 SOT23-5	~	2.8V
N150	4341417	Top	O	7	USMD18_ST_NSC_H0.63	AF AMP 85MW 5V LM4855ITLX USMD18	~	~
N300	4341087	Top	N	2	TSOP_6_H1.1	HALL IC SWITCH TLE4917 TSSOP6	~	~
N301	4341485	Top	F	3	USMD5_1.442X1.087_H0.675	REG 1.8V/150MA (LP2985ITLX) USMD5	~	1.8V
N350	4860121	Top	G	9	IRDA_RPM960	IRDA RPM960-H7 1.152MB/S >2.4V 8PIN	~	~
N356	4341427	Top	H	3	HVQFN40	FM RECEIVER TEA5767HN LQFP40	~	~
N500	4370949	Top	H	6	uBGA_108_P0.5	HELGO73A TFBGA108	~	~
N700	435B110	Top	D	5	LGA_24	PW AMP 824-1910MHZ 2W 3.6V EDGE	~	~
R100	1430726	Bottom	N	5	0402R	Resistor 5% 63mW	100R	~
R101	1430726	Bottom	N	5	0402R	Resistor 5% 63mW	100R	~
R102	1430726	Bottom	N	5	0402R	Resistor 5% 63mW	100R	~
R103	4120011	Bottom	N	5	uBGA5	ZDIX4 IP4043CX5 CA 14V2 10W CSP5	~	~
R104	1430812	Bottom	M	5	0402R	Resistor 5% 63mW	220k	~
R105	1825133	Bottom	N	7	0402_VAR	CHIP VARISTOR VWM14V VC50V 0402	14V/50V	~
R106	1825133	Bottom	M	7	0402_VAR	CHIP VARISTOR VWM14V VC50V 0402	14V/50V	~
R107	1825133	Bottom	N	7	0402_VAR	CHIP VARISTOR VWM14V VC50V 0402	14V/50V	~
R108	1825133	Bottom	N	7	0402_VAR	CHIP VARISTOR VWM14V VC50V 0402	14V/50V	~
R109	1430804	Top	N	7	0402R	Resistor 5% 63mW	100k	~
R110	1820039	Bottom	N	3	0402_NTH5	NTC RES 47K J B=4050+-3% 0402	47k	~
R111	1430804	Bottom	N	4	0402R	Resistor 5% 63mW	100k	~
R151	1825133	Bottom	B	3	0402_VAR	CHIP VARISTOR VWM14V VC50V 0402	14V/50V	~
R152	1825133	Bottom	A	3	0402_VAR	CHIP VARISTOR VWM14V VC50V 0402	14V/50V	~
R153	1430754	Bottom	N	6	0402R	Resistor 5% 63mW	1k0	~
R154	1430754	Bottom	N	5	0402R	Resistor 5% 63mW	1k0	~
R155	1620105	Bottom	M	6	MNR02	RES NETWORK 0W06 2X2k2 J 0404	2x2k2	~
R156	1430762	Bottom	M	9	0402R	Resistor 5% 63mW	2k2	~
R157	1620105	Bottom	L	9	MNR02	RES NETWORK 0W06 2X2k2 J 0404	2x2k2	~
R158	1825133	Bottom	N	6	0402_VAR	CHIP VARISTOR VWM14V VC50V 0402	14V/50V	~
R159	1825133	Bottom	N	5	0402_VAR	CHIP VARISTOR VWM14V VC50V 0402	14V/50V	~
R161	1825133	Bottom	A	3	0402_VAR	CHIP VARISTOR VWM14V VC50V 0402	14V/50V	~
R162	1825133	Bottom	A	3	0402_VAR	CHIP VARISTOR VWM14V VC50V 0402	14V/50V	~
R163	1430764	Top	N	7	0402R	Resistor 5% 63mW	3k3	~
R164	1620035	Top	O	7	MNR02_SR	RES NETWORK 0W06 2X10R J 0404	2x10R	~
R167	1620035	Top	O	7	MNR02_SR	RES NETWORK 0W06 2X10R J 0404	2x10R	~
R170	1430754	Top	N	8	0402R	Resistor 5% 63mW	1k0	~
R171	1430734	Bottom	M	9	0402R	Resistor 5% 63mW	220R	~
R172	1430734	Bottom	M	7	0402R	Resistor 5% 63mW	220R	~
R200	1414605	Top	L	9	0805R_THERM1	CHIPRES 0W25 0R22 J 0805	0R22	~
R202	1620043	Top	N	6	EXB28V	RES NETWORK 0W03 4X100K J 0804	4x100k	~
R206	1430770	Top	N	6	0402R	Resistor 5% 63mW	4k7	~
R207	1430770	Top	N	6	0402R	Resistor 5% 63mW	4k7	~
R300	1430734	Top	K	2	0402R	Resistor 5% 63mW	220R	~
R307	1825133	Top	N	2	0402_VAR	CHIP VARISTOR VWM14V VC50V 0402	14V/50V	~
R308	1430726	Top	O	2	0402R	Resistor 5% 63mW	100R	~
R320	1430784	Top	E	3	0402R	Resistor 5% 63mW	15k	~
R321	1430726	Top	D	2	0402R	Resistor 5% 63mW	100R	~
R322	1430726	Top	E	2	0402R	Resistor 5% 63mW	100R	~
R323	1430778	Top	D	3	0402R	Resistor 5% 63mW	10k	~
R324	1430770	Top	E	2	0402R	Resistor 5% 63mW	4k7	~
R325	1430770	Top	E	2	0402R	Resistor 5% 63mW	4k7	~
R328	4120071	Top	C	2	uBGA8	ASIP EMIF03-SIM01 SIM FILTER BGA8	~	~
R329	1825133	Top	B	3	0402_VAR	CHIP VARISTOR VWM14V VC50V 0402	14V/50V	~
R330	1430738	Top	C	3	0402R	Resistor 5% 63mW	270R	~
R332	1430792	Top	C	3	0402R	Resistor 5% 63mW	33k	~
R333	1430800	Top	C	3	0402R	Resistor 5% 63mW	68k	~
R350	1413850	Bottom	H	9	0805R_THERM1	CHIPRES 0W125 4R7 J 0805	4R7	~
R357	1430792	Top	I	3	0402R	Resistor 5% 63mW	33k	~
R359	1430778	Top	H	2	0402R	Resistor 5% 63mW	10k	~
R360	1430804	Top	I	2	0402R	Resistor 5% 63mW	100k	~
R361	1620019	Top	I	3	0404_R_SR	RES NETWORK 0W06 2X10K J 0404	2x10k	~
R367	1430786	Top	G	2	0402R	Resistor 5% 63mW	18k	~
R369	1430792	Top	G	4	0402R	Resistor 5% 63mW	33k	~
R420	1430726	Top	L	5	0402R	Resistor 5% 63mW	100R	~
R421	1430778	Top	J	6	0402R	Resistor 5% 63mW	10k	~

 ©Nokia Corporation.

Item	Code	Side	X	Y	Type	Name	Value	
R422	1430790	Top	K	6	0402R	Resistor 5% 63mW	27k	~
R423	1430778	Top	J	6	0402R	Resistor 5% 63mW	10k	~
R450	1430770	Top	K	5	0402R	Resistor 5% 63mW	4k7	~
R500	1430693	Top	H	8	0402R	Chipres 0W06 5R6 J 0402	5R6	~
R501	1430772	Top	I	8	0402R	Resistor 5% 63mW	5k6	~
R502	1430841	Top	I	8	0402R	Chipres 0W06 6k8 F 0402	6k8	~
R503	1430770	Top	G	6	0402R	Resistor 5% 63mW	4k7	~
R504	1430780	Top	G	5	0402R	Resistor 5% 63mW	12k	~
R505	1430770	Top	G	5	0402R	Resistor 5% 63mW	4k7	~
R507	1430756	Top	G	5	0402R	Resistor 5% 63mW	1k2	~
R516	1620033	Top	I	5	0404_R	RES NETWORK 0W06 2X5K6 J 0404	2x5k6	~
R517	1620033	Top	I	6	0404_R	RES NETWORK 0W06 2X5K6 J 0404	2x5k6	~
R518	1430690	Top	I	6	0402R	Chipres 0W06 jumper 0402	0R	~
R520	1430774	Top	H	5	0402R	Resistor 5% 63mW	6k8	~
R522	1430784	Top	I	7	0402R	Resistor 5% 63mW	15k	~
R523	1430865	Top	H	7	0402R	CHIPRES 0W06 5K6 F 0402	5k6	~
R525	1430770	Top	H	7	0402R	Resistor 5% 63mW	4k7	~
R531	1430726	Top	G	6	0402R	Resistor 5% 63mW	100R	~
R538	1430690	Top	G	5	0402R	Chipres 0W06 jumper 0402	0R	~
R540	1430754	Top	G	7	0402R	Resistor 5% 63mW	1k0	~
R546	1430726	Top	G	5	0402R	Resistor 5% 63mW	100R	~
R700	1430728	Top	D	6	0402R	Resistor 5% 63mW	120R	~
R701	1430832	Top	D	6	0402R	Resistor 5% 63mW	2k7	~
R704	1430691	Top	E	6	0402R	CHIPRES 0W06 2R2 J 0402	2R2	~
R705	1430714	Top	E	5	0402R	Resistor 5% 63mW	33R	~
R706	1430700	Top	C	4	0402R	Resistor 5% 63mW	10R	~
R707	1430714	Top	F	5	0402R	Resistor 5% 63mW	33R	~
R708	1430691	Top	G	4	0402R	CHIPRES 0W06 2R2 J 0402	2R2	~
R709	1430690	Top	E	4	0402R	Chipres 0W06 jumper 0402	0R	~
R711	1430778	Top	D	6	0402R	Resistor 5% 63mW	10k	~
R712	1430700	Top	D	4	0402R	Resistor 5% 63mW	10R	~
R713	1430700	Top	D	6	0402R	Resistor 5% 63mW	10R	~
R715	1430794	Top	O	6	0402R	Resistor 5% 63mW	39k	~
R716	1430690	Top	E	6	0402R	Chipres 0W06 jumper 0402	0R	~
R717	1430756	Top	D	6	0402R	Resistor 5% 63mW	1k2	~
R718	1430690	Top	D	4	0402R	Chipres 0W06 jumper 0402	0R	~
R800	1430700	Top	F	6	0402R	Resistor 5% 63mW	10R	~
R801	1430738	Top	E	7	0402R	Resistor 5% 63mW	270R	~
S300	5209001	Top	C	1	BUTTON_EVQPUA02	SM SW TACT SPST 12V 50MA SIDE KEY	~	~
S301	5209001	Top	F	1	BUTTON_EVQPUA02	SM SW TACT SPST 12V 50MA SIDE KEY	~	~
S302	5209001	Top	I	9	BUTTON_EVQPUA02	SM SW TACT SPST 12V 50MA SIDE KEY	~	~
T500	4550187	Top	I	6	TRANS_LDB213	TRANSF BALUN 3600MHZ+-400MHZ	~	~
T700	4550223	Top	E	6	TRANS_LDB15	TRANSF BALUN 1800+-100mhz 2x1.25	~	~
V100	4113721	Top	O	6	CASE_457	TVS DI 1PMT16AT3 16V 175W PWRMITE	~	~
V313	4210043	Top	O	3	EM3	TR DTC143ZE RB=4K7 RBE=47K EM3	~	~
V356	4110965	Top	I	2	SOD_523	CAP.DI BB202 CT=2.5 FM 0R8 SOD523	~	~
V357	4110965	Top	I	2	SOD_523	CAP.DI BB202 CT=2.5 FM 0R8 SOD523	~	~
V802	4210261	Top	E	7	SOT_363	TR BGA428 LNA1.8GHZ 19.5DB SOT363	~	~
X101	5460061	Bottom	O	5	SYSCON_MQ202_NK_14R3	SM SYSTEM CONNECTOR 14POL	~	~
X102	5400243	Bottom	O	2	CON_JACK_HR33	CONN DC-JACK 3.5MM 3POL SPR 90DEG	~	~
X103	5409251	Bottom	A	7	CONN_CY_5225_1817H	SM BATTERY CONN 3POLE SPR	~	~
X301	5409327	Top	M	2	CONN_CT7_00139_200	SM CONN 20P P0.47 PWB/PWB	~	~
X302	5409315	Top	A	4	JST_CO3_00352_200	SM CONN PORTABLE 2X20 P0.4PWB SMD	~	~
X303	5409309	Top	D	1	TRACEABILITY_PAD	MODULE ID COMPONENT 2.8X1.8X0.3	~	~
X800	5429011	Top	A	6	CRS5001_0801	SM COAX CONN RECEPTACLE 50R 3GHZ	~	~
Z300	4120031	Top	K	2	uBGA24	EMI/ESD FILT EMIF10-1K010F1 BGA24	~	~
Z700	4511407	Top	E	5	FILTER_FAR_F5CQ	SAW FILTER 897.5+-17.5MHZ 2X2.5	897.5MHz	~
Z802	3640427	Top	F	7	TRANS_LDB20	BALUN TRANS 1.9GHZ+/-100MHZ 1206	~	~
Z806	4511405	Top	D	7	FILTER_SAFET	SAW FILT 1960+-30MHZ/5DB 2.5X2.0MM	1960MHz	~
Z807	4511413	Top	D	7	FILTER_FAR_F6CQ	SAW FILT 1842.5+-37.5MHZ 2.5X2MM	1842.5MHz	~
Z808	4511411	Top	E	8	FILTER_FAR_F5CQ	SAW FILT 942.5+-17.5MHZ 2.5X2.0MM	942.5MHz	~
Z809	4550293	Top	C	7	ANT_SW_LMSP_0055	ANT.SWITCH 824-960/1710-1990MHZ	~	~

 ©Nokia Corporation.